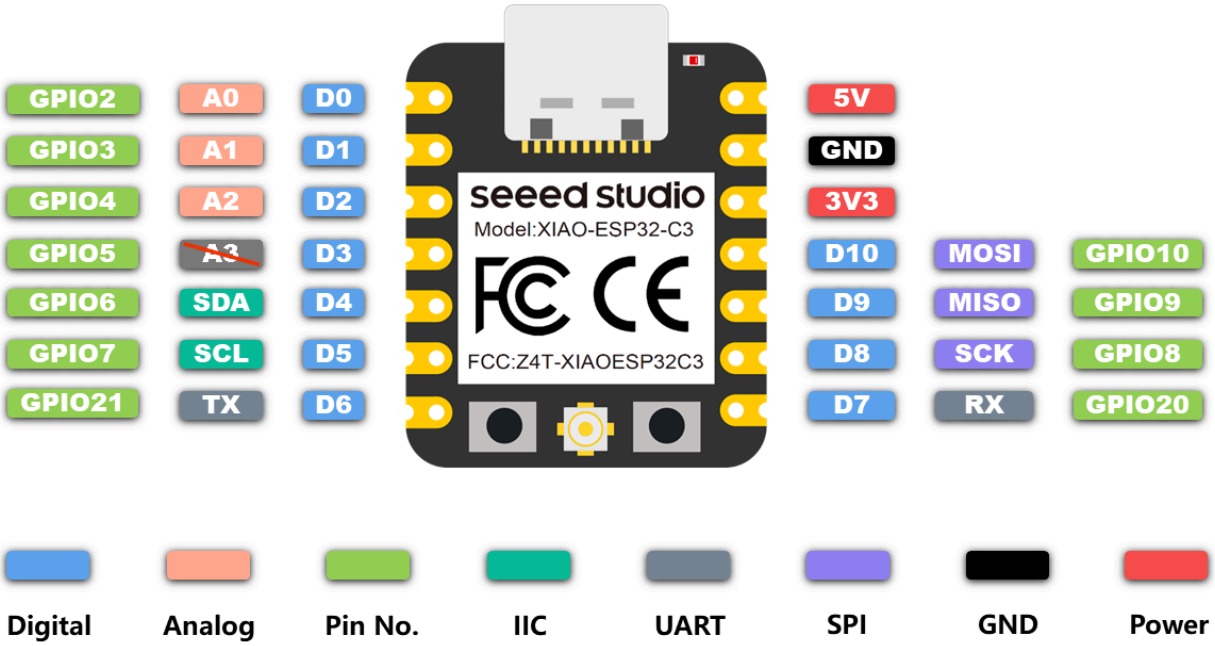


A3(GPIO5) - Uses ADC2, which may become inoperative due to false sampling signals. For reliable analog reads, use ADC1 instead. Refer to the ESP32-C3 datasheet.

From:
https://kornequipped.com/mywiki/ - **KornEquipped WiKi**

Permanent link:
https://kornequipped.com/mywiki/doku.php?id=seeed_xiao_pinout

Last update: **2026/04/25 13:20**