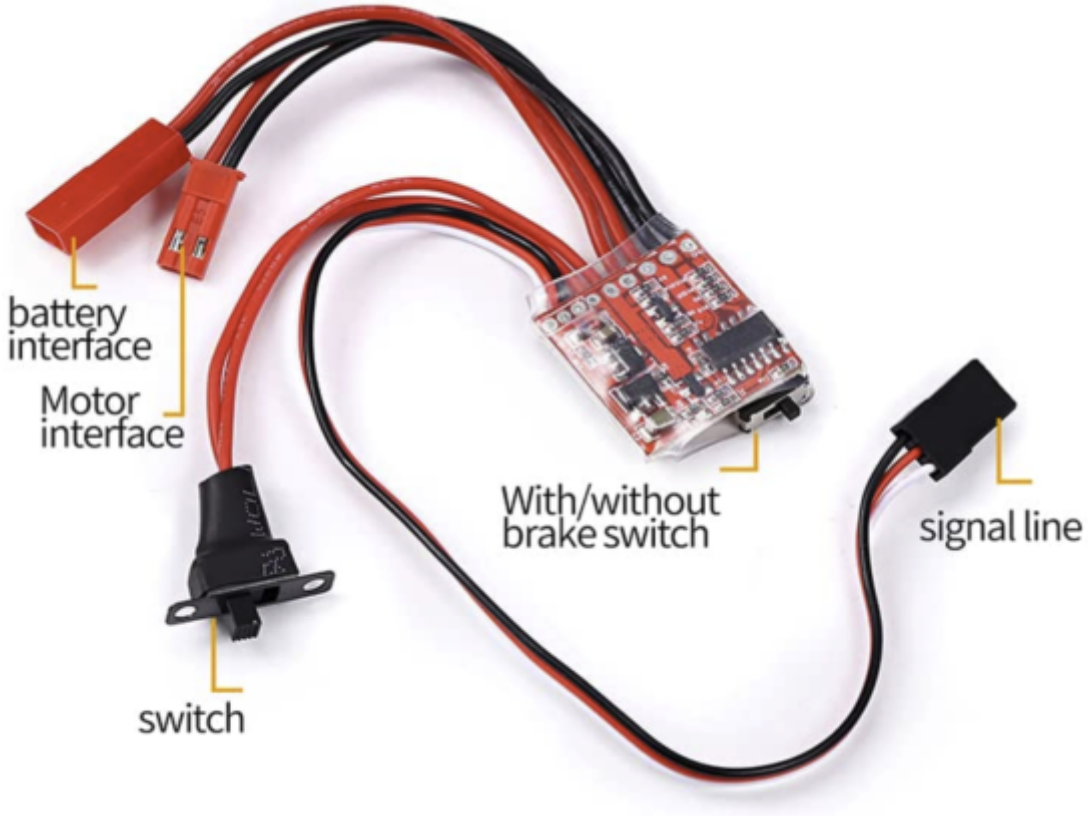



| Product name: 20A brushed ESC |
| --- |
| Suitable for 1/16, 1/18, 1/24 remote control climbing car military truck semi-big truck modification, remote control boat,The light weight is also suitable for mini-Z mosquito car modification |
| Function: forward, reverse, brake |
| Working voltage: 4.8V--8.4V (suitable for 2S lithium battery) |
| Current (A): 20A |
| Drive frequency: 2kHz |
| Input: Li Po 2S/Ni-MH/Ni-Cd 4-7 battery |
| Constant current: 20A, 25A<30s pulse 50A<5s |
| UBEC output: voltage 5.7V, current 1A |
| This ESC can be matched with 130/180/260/280/380 brush motor |
| Adjustment: The ESC is in the middle range, the new controller needs to fine-tune the throttle, so that the ESC light does not light up, keep it on Neutral, controlled throttle trim is TH TRIM |
| Weight: 8g |

From:
https://kornequipped.com/mywiki/ - **KornEquipped WiKi**

Permanent link:
**https://kornequipped.com/mywiki/doku.php?id=20a_rc_speed_control**

Last update: **2026/01/30 22:52**